

Individual mounting

sub-base non "plug-in"	sub-base "plug-in"


Series

Manifold mounting

sub-base non "plug-in"	sub-base "plug-in"

35

100

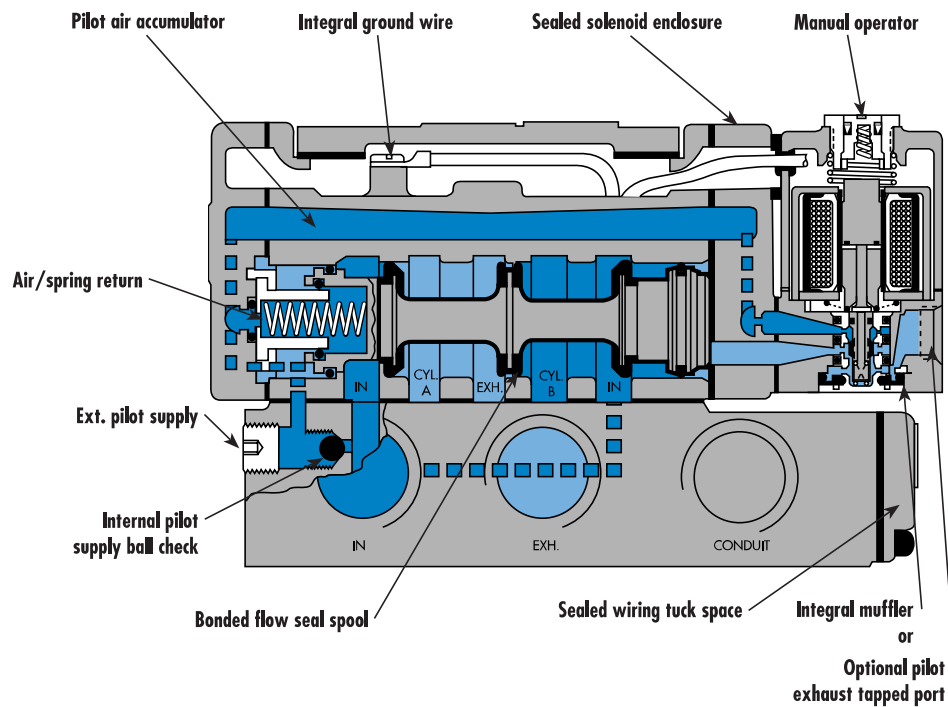

200

55

56

57

58

59

45

700

900

82

6300

6500

6600

1300

800

ISO 1

ISO 2

ISO 3

MAC 125A


MAC 250A

MAC 500A


SERIES FEATURES

- The patented MACSOLENOID® with its non-burn out feature on AC service.
- A large checked accumulator for consistent shifting on single and double solenoid models.
- A plug-in design that provides for internal or external pilot with or without lights and all electrical and air plumbing in the base — the valve portion is the same.
- Non-lubricated or lubricated service.
- Optional low wattage DC solenoids down to 1 watt.
- Optional indicator lights, and various types of manual operators.
- Non plug-in or external plug-in models are available.


SPOOL CONFIGURATIONS

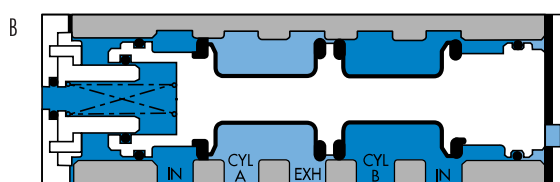


2 POS. SINGLE OPERATOR SPRING RETURN
B ACTUATED SHOWN

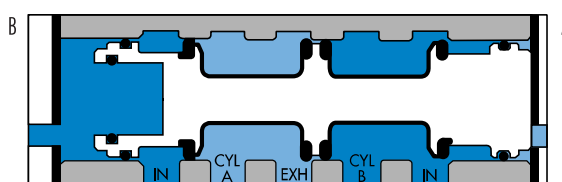

2 POS. DOUBLE OPERATOR
B ACTUATED SHOWN

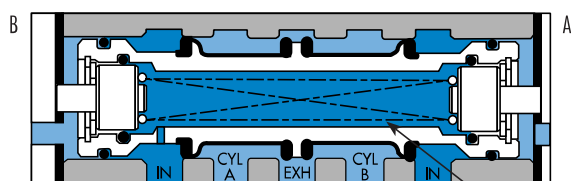


3 POS. OPEN CENTER
CENTER POSITION SHOWN

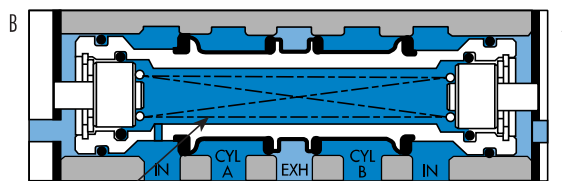

3 POS. CLOSED CENTER
CENTER POSITION SHOWN

AIR/SPRING
CENTERING

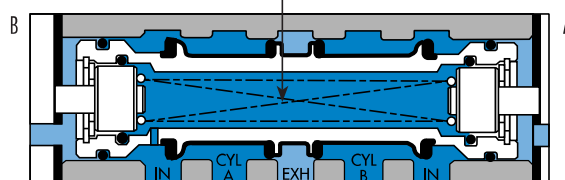

3 POS. PRESSURE CENTER
CENTER POSITION SHOWN

VALVE CONFIGURATIONS AVAILABLE

The versatile 6500 Series provides high flow, extremely fast response, and long life in a compact package and is available in the following configurations:

- 2-Pos., single or double operators (solenoid or remote air).
- 3-Pos., double operator-Closed Center, Open Center or Pressure Center (solenoid or remote air).
- Single pressure or dual pressure.
- Individual base or add-a-unit manifold base.
- Internal pilot or for Vacuum to 25 PSI main valve pressures, external pilot.
- Manual and mechanical operators available.

REMOTE AIR PILOT OPERATED VALVES

- A large checked accumulator for air/spring return on single remote air models.
- All piping connections, including the remote air pilot supply, in the base.
- Non-lubricated or lubricated service.

REMOTE AIR PILOT, PILOT OPERATED VALVES

These special air versions have the same features as the remote air pilot operated models, but additionally feature:

- A manual operator and indicator.
- Ability to use a pilot signal pressure different from the main valve pressure. Pilot signal can be from 20 to 150 PSIG, regardless of main valve pressure.

ALL MODELS AVAILABLE WITH SANDWICH TYPE REGULATORS

Function	Port size	Flow [Max]	Individual mounting	Series
----------	-----------	------------	---------------------	--------

4/2 - 4/3

3/8" - 1/2" - 3/4"

5.1 C_v

Individual mounting




sub-base
non "plug-in"

Series

OPERATIONAL BENEFITS

1. Balanced spool, immune to variations of pressure.
2. Short stroke with high flow.
3. High shifting forces.
4. Checked accumulator guarantees maximum pilot pressure.
5. Powerful return force thanks to the combination of mechanical and air springs.
6. Bonded spool with minimum friction, shifting in a glass-like finished bore.
7. Wiping effect eliminates sticking.
8. Pilot valve with balanced poppet, high flow, short and consistent response times.

HOW TO ORDER

Port size	Pilot air	4/2 Single operator	4/2 Double operator	4/3 Closed center	4/3 Open center	4/3 Pressure center
						
Valve less base		6512B-000-PM- XXYYZZ	6522B-000-PM- XXYYZZ	6532B-000-PM- XXYYZZ	6542B-000-PM- XXYYZZ	6552B-000-PM- XXYYZZ
sub-base	Internal	6512B-131-PM- XXYYZZ	6522B-131-PM- XXYYZZ	6532B-131-PM- XXYYZZ	6542B-131-PM- XXYYZZ	6552B-131-PM- XXYYZZ
3/8" NPTF	External	6512B-141-PM- XXYYZZ	6522B-141-PM- XXYYZZ	6532B-141-PM- XXYYZZ	6542B-141-PM- XXYYZZ	6552B-141-PM- XXYYZZ
sub-base	Internal	6512B-231-PM- XXYYZZ	6522B-231-PM- XXYYZZ	6532B-231-PM- XXYYZZ	6542B-231-PM- XXYYZZ	6552B-231-PM- XXYYZZ
1/2" NPTF	External	6512B-241-PM- XXYYZZ	6522B-241-PM- XXYYZZ	6532B-241-PM- XXYYZZ	6542B-241-PM- XXYYZZ	6552B-241-PM- XXYYZZ
sub-base	Internal	6512B-331-PM- XXYYZZ	6522B-331-PM- XXYYZZ	6532B-331-PM- XXYYZZ	6542B-331-PM- XXYYZZ	6552B-331-PM- XXYYZZ
3/4" NPTF	External	6512B-341-PM- XXYYZZ	6522B-341-PM- XXYYZZ	6532B-341-PM- XXYYZZ	6542B-341-PM- XXYYZZ	6552B-341-PM- XXYYZZ

Note : Above codes shown are for side ports.

SOLENOID OPERATOR ►

XX Y ZZ*		
XX Voltage	Y Manual operator	ZZ Electrical connection
11 120/60, 110/50	1 Non-locking	JB Rectangular connector
12 240/60, 220/50	2 Locking	JD Rectangular connector with light
22 24/60, 24/50		JA Square connector
59 24 VDC (2.5 W)		JC Square connector with light
87 24 VDC (17.1 W)		BA Flying leads (18")
61 24 VDC (8.5 W)		

* Other options available, see page 357.

OPTIONS

6512B-XXX-PM-**XXYYZZ**

- For piped pilot exhaust replace M by P.
- For dual pressure valve, replace by 4.

MODIFICATIONS

MOD. N°	DESCRIPTION	MODEL AVAILABILITY
0002	Bottom inlet, exh. & cyl. ports (no side ports)	Available on individual base 3/8" & 1/2" only
0004	Full side porting and additional bottom inlet, exh. & cyl. ports	Available on individual base 3/8" only

Note : 1. The valve less base is always the same for internal or external pilot. These options are effected in the base.

2. Bottom ports : Refer to modification table.

3. To order bases without the valve, choose the base from the above table, then add 6500B as a prefix. Example 6500B-131.

Consult "Precautions" page 364 before use, installation or service of MAC Valves

35

100

200

55

56

57

58

59

45

700

900

82

6300

6500

6600

1300

800

ISO 1

ISO 2

ISO 3

MAC 125A

MAC 250A

MAC 500A



TECHNICAL DATA


Fluid :	Compressed air, vacuum, inert gases		
Pressure range :	Internal pilot : single operator and 3 positions : 25-150 PSI double operator : 10-150 PSI External pilot : vacuum to 150 PSI		
Pilot pressure :	Single operator and 3 positions : 25-150 PSI Double operator : 10-150 PSI		
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F to 210°F)		
Filtration :	40 µ		
Temperature range :	0°F to 120°F (-18°C to 50°C)		
Flow (at 6 bar, ΔP=1bar) :	3/8" : (4.5 C _v), 1/2" : (5.0 C _v), 3/4" : (5.1 C _v)		
Coil :	Epoxy encapsulated - class A wires - Continuous duty		
Voltage range :	-15% to +10% of nominal voltage		
Protection :	Consult factory		
Power :	~ Inrush : 14.8 VA Holding : 10.9 VA = 1 to 17.1 W		
Response times :	24 VDC (8.5 W)	Energize : 12 ms	De-energize : 12 ms
	120/60	Energize : 9-14 ms	De-energize : 11-18 ms

Spare parts : Solenoid operator (power ≥ 4 W) : D1-XXAA, cover mounting screws 35206 and seal 16234.
 • Pilot valve : PME-XYZZ, including seal 16337. • Pressure seal between valve and base : 16246.
 • Mounting screw valve to base (x4) : 32201.

Options : • BSPP threads.

DIMENSIONS

Dimensions shown are metric (mm)

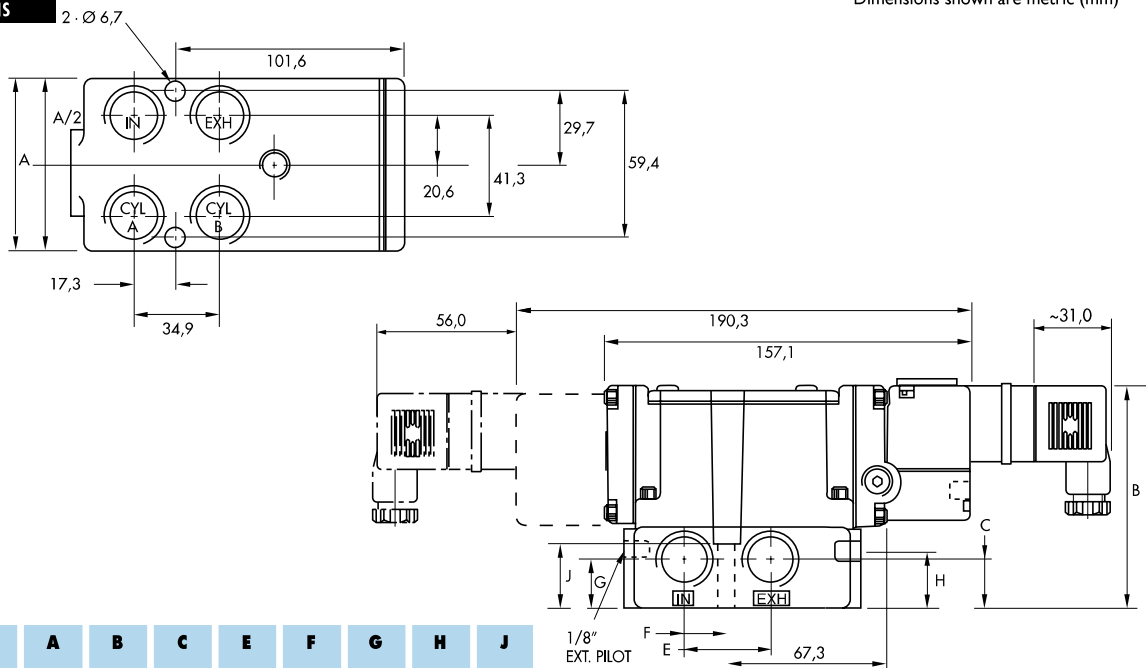

Port size	A	B	C	E	F	G	H	J
3/8" - 1/2"	69.6	97.4	18.3	36.0	17.9	19.0	23.6	25.4
3/4"	94.5	109.3	17.3	40.1	19.2	20.8	35.9	36.6



Direct solenoid and solenoid pilot operated valves

Function Port size Flow [Max] Individual mounting Series

4/2 - 4/3

3/8" - 1/2" - 3/4" 5.1 C_v

sub-base
"plug-in"

OPERATIONAL BENEFITS

1. Balanced spool, immune to variations of pressure.
2. Short stroke with high flow.
3. High shifting forces.
4. Checked accumulator guarantees maximum pilot pressure.
5. Powerful return force thanks to the combination of mechanical and air springs.
6. Bonded spool with minimum friction, shifting in a glass-like finished bore.
7. Wiping effect eliminates sticking.
8. Pilot valve with balanced poppet, high flow, short and consistent response times.

HOW TO ORDER

Port size	Pilot air	4/2 Single operator	4/2 Double operator	4/3 Closed center	4/3 Open center	4/3 Pressure center
Valve less base		6511B-000-PM-XXYDA	6521B-000-PM-XXYDA	6531B-000-PM-XXYDA	6541B-000-PM-XXYDA	6551B-000-PM-XXYDA
sub-base	Internal	6511B-111-PM-XXYDA	6521B-111-PM-XXYDA	6531B-111-PM-XXYDA	6541B-111-PM-XXYDA	6551B-111-PM-XXYDA
3/8" NPTF	External	6511B-121-PM-XXYDA	6521B-121-PM-XXYDA	6531B-121-PM-XXYDA	6541B-121-PM-XXYDA	6551B-121-PM-XXYDA
sub-base	Internal	6511B-211-PM-XXYDA	6521B-211-PM-XXYDA	6531B-211-PM-XXYDA	6541B-211-PM-XXYDA	6551B-211-PM-XXYDA
1/2" NPTF	External	6511B-221-PM-XXYDA	6521B-221-PM-XXYDA	6531B-221-PM-XXYDA	6541B-221-PM-XXYDA	6551B-221-PM-XXYDA
sub-base	Internal	6511B-311-PM-XXYDA	6521B-311-PM-XXYDA	6531B-311-PM-XXYDA	6541B-311-PM-XXYDA	6551B-311-PM-XXYDA
3/4" NPTF	External	6511B-321-PM-XXYDA	6521B-321-PM-XXYDA	6531B-321-PM-XXYDA	6541B-321-PM-XXYDA	6551B-321-PM-XXYDA

Note : Above codes shown are for side ports without lights.

SOLENOID OPERATOR ►

XX Y DA *

XX Voltage	Y Manual operator
11 120/60, 110/50	1 Non-locking
12 240/60, 240/50	2 Locking
22 24/60, 24/50	
59 24 VDC (2.5 W)	
87 24 VDC (17.1 W)	
61 24 VDC (8.5 W)	

* Other options available, see page 357.

OPTIONS

6511B-XXX-PM-XXYDA

- For piped pilot exhaust replace M by P.
- For dual pressure valve replace by 4 (no light), by 5 (sgl. light), by 6 (dbl. light).
- For lights on base, replace by 2 (sgl. light), by 3 (dbl. light).
- For lights on valve body, replace by 3.

MODIFICATIONS

MOD. N°	DESCRIPTION	MODEL AVAILABILITY
0002	Bottom inlet, exh. & cyl. ports (no side ports)	Available on individual base 3/8" & 1/2" only
0004	Full side porting and additional bottom inlet, exh. & cyl. ports	Available on individual base 3/8" only

- Note :
1. The valve less base is always the same for internal or external pilot. These options are effected in the base.
 2. Bottom ports : Refer to modification table.
 3. To order bases without the valve, choose the base from the above table, then add 6500B as a prefix. Example 6500B-111.

Consult "Precautions" page 364 before use, installation or service of MAC Valves

35

100

200

55

56

57

58

59

45

700

900

82

6300

6500

6600

1300

800

ISO 1

ISO 2

ISO 3

MAC 125A

MAC 250A

MAC 500A

TECHNICAL DATA

Fluid :	Compressed air, vacuum, inert gases		
Pressure range :	Internal pilot : single operator and 3 positions : 25-150 PSI double operator : 10-150 PSI External pilot : vacuum to 150 PSI		
Pilot pressure :	Single operator and 3 positions : 25-150 PSI Double operator : 10-150 PSI		
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F to 210°F)		
Filtration :	40 µ		
Temperature range :	0°F to 120°F (-18°C to 50°C)		
Flow (at 6 bar, ΔP=1bar) :	3/8" : (4.5 C _v), 1/2" : (5.0 C _v), 3/4" : (5.1 C _v)		
Coil :	Epoxy encapsulated - class A wires - Continuous duty		
Voltage range :	-15% to +10% of nominal voltage		
Protection :	Consult factory		
Power :	~ Inrush : 14.8 VA Holding : 10.9 VA = 1 to 17.1 W		
Response times :	24 VDC (8.5 W)	Energize : 12 ms	De-energize : 12 ms
	120/60	Energize : 9-14 ms	De-energize : 11-18 ms

Spare parts :



- Solenoid operator (power ≥ 4 W) : D1-XXBE, cover mounting screws 35206 and seal 16234.
- Pilot valve : PME-XXYDA-BE, including seal 16337. • Pressure seal between valve and base : 16246.
- Mounting screw valve to base (x4) : 32201.

Options :

- BSPP threads.

DIMENSIONS

Dimensions shown are metric (mm)

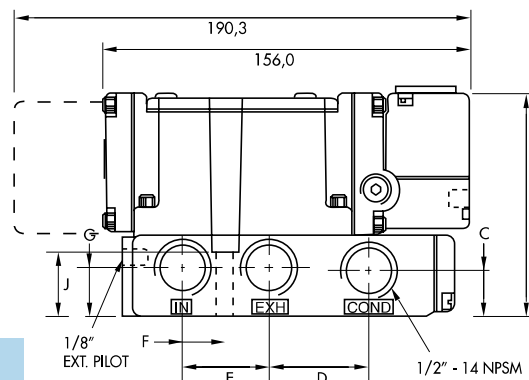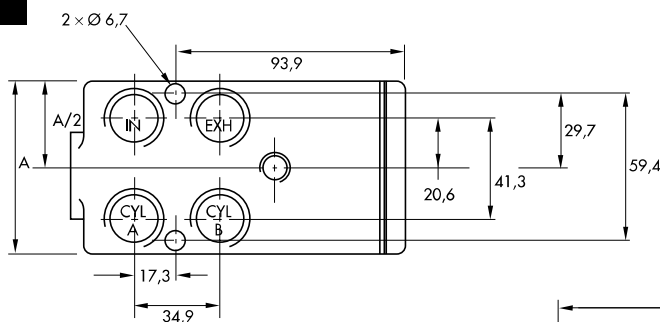

Port size	A	B	C	D	E	F	G	H	J
3/8" - 1/2"	69.6	97.4	18.3	40.6	36.0	17.9	19.0	23.6	25.4
3/4"	94.5	109.3	17.3	46.7	40.1	19.2	20.8	35.9	36.6

Function Port size Flow [Max] Manifold mounting Series

4/2 - 4/3

3/8" - 1/2" - 3/4"

5.1 C_v






sub-base
non "plug-in"

Series

OPERATIONAL BENEFITS

1. Balanced spool, immune to variations of pressure.
2. Short stroke with high flow.
3. High shifting forces.
4. Checked accumulator guarantees maximum pilot pressure.
5. Powerful return force thanks to the combination of mechanical and air springs.
6. Bonded spool with minimum friction, shifting in a glass-like finished bore.
7. Wiping effect eliminates sticking.
8. Pilot valve with balanced poppet, high flow, short and consistent response times.

HOW TO ORDER

Port size	Pilot air	4/2 Single operator	4/2 Double operator	4/3 Closed center	4/3 Open center	4/3 Pressure center
						
Valve less base		6512B-000-PM- XXYZZ	6522B-000-PM- XXYZZ	6532B-000-PM- XXYZZ	6542B-000-PM- XXYZZ	6552B-000-PM- XXYZZ
sub-base	Internal	6512B-431-PM- XXYZZ	6522B-431-PM- XXYZZ	6532B-431-PM- XXYZZ	6542B-431-PM- XXYZZ	6552B-431-PM- XXYZZ
3/8" NPTF	External	6512B-441-PM- XXYZZ	6522B-441-PM- XXYZZ	6532B-441-PM- XXYZZ	6542B-441-PM- XXYZZ	6552B-441-PM- XXYZZ
sub-base	Internal	6512B-531-PM- XXYZZ	6522B-531-PM- XXYZZ	6532B-531-PM- XXYZZ	6542B-531-PM- XXYZZ	6552B-531-PM- XXYZZ
1/2" NPTF	External	6512B-541-PM- XXYZZ	6522B-541-PM- XXYZZ	6532B-541-PM- XXYZZ	6542B-541-PM- XXYZZ	6552B-541-PM- XXYZZ
sub-base	Internal	6512B-631-PM- XXYZZ	6522B-631-PM- XXYZZ	6532B-631-PM- XXYZZ	6542B-631-PM- XXYZZ	6552B-631-PM- XXYZZ
3/4" NPTF	External	6512B-641-PM- XXYZZ	6522B-641-PM- XXYZZ	6532B-641-PM- XXYZZ	6542B-641-PM- XXYZZ	6552B-641-PM- XXYZZ

Note : Above codes shown are for side cylinder ports.

SOLENOID OPERATOR ►

XX Y ZZ*

XX Voltage	Y Manual operator	ZZ Electrical connection
11 120/60, 110/50	1 Non-locking	JB Rectangular connector
12 240/60, 220/50	2 Locking	JD Rectangular connector with light
22 24/60, 24/50		JA Square connector
59 24 VDC (2.5 W)		JC Square connector with light
87 24 VDC (17.1 W)		BA Flying leads (18")
61 24 VDC (8.5 W)		

* Other options available, see page 357.

OPTIONS

6512B-XXX-PM-**XXYZZ**

- For piped pilot exhaust replace M by P.
- For dual pressure valve, replace by 4.

MODIFICATIONS

MOD. N°	DESCRIPTION	MODEL AVAILABILITY
0112	Side inlet & exhaust with bottom cyl. ports (No end cyl. ports)	Available on all manifold models
0210	Porting as ordered in model number plus an additional bottom inlet	Available on all manifold models
0364	Sgl. pressure — side inlet & exh. and additional bottom inlet with bottom cyl. ports (No end cyl. ports) DUAL PRESSURE — Same as sgl. pressure except with two bottom inlets.	Available on all manifold models

- Note :
1. The valve less base is always the same for internal or external pilot. These options are effected in the manifold.
 2. Bottom ports : Refer to modification table.
 3. To order manifolds without the valve, choose the manifold from the above table, then add 6500B as a prefix. Example 6500B-431.

35

100

200

55

56

57

58

59

45

700

900

82

6300

6500

6600

1300

800

ISO 1

ISO 2

ISO 3

MAC 125A

MAC 250A

MAC 500A

TECHNICAL DATA

Fluid :	Compressed air, vacuum, inert gases		
Pressure range :	Internal pilot : single operator and 3 positions : 25-150 PSI double operator : 10-150 PSI External pilot : vacuum to 150 PSI		
Pilot pressure :	Single operator and 3 positions : 25-150 PSI Double operator : 10-150 PSI		
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F to 210°F)		
Filtration :	40 µ		
Temperature range :	0°F to 120°F (-18°C to 50°C)		
Flow (at 6 bar, ΔP=1bar) :	3/8" : (4.5 C _v), 1/2" : (5.0 C _v), 3/4" : (5.1 C _v)		
Coil :	Epoxy encapsulated - class A wires - Continuous duty		
Voltage range :	-15% to +10% of nominal voltage		
Protection :	Consult factory		
Power :	~ Inrush : 14.8 VA Holding : 10.9 VA = 1 to 17.1 W		
Response times :	24 VDC (8.5 W)	Energize : 12 ms	De-energize : 12 ms
	120/60	Energize : 9-14 ms	De-energize : 11-18 ms

Spare parts :


- Solenoid operator (power ≥ 4 W) : D1-XXAA, cover mounting screws 35206 and seal 16234.
- Pilot valve : PME-XXYZZ, including seal 16337. • Pressure seal between valve and base : 16246.
- Mounting screw valve to base (x4) : 32201. • Tie-rod (x2) : 19540. • Fastening kit : N-65002-01
- Inlet isolator : 28309. • Exhaust isolator : 28310. • Blank station cover plate : N-65009.

Options :

- BSPP threads.

DIMENSIONS

Dimensions shown are metric (mm)

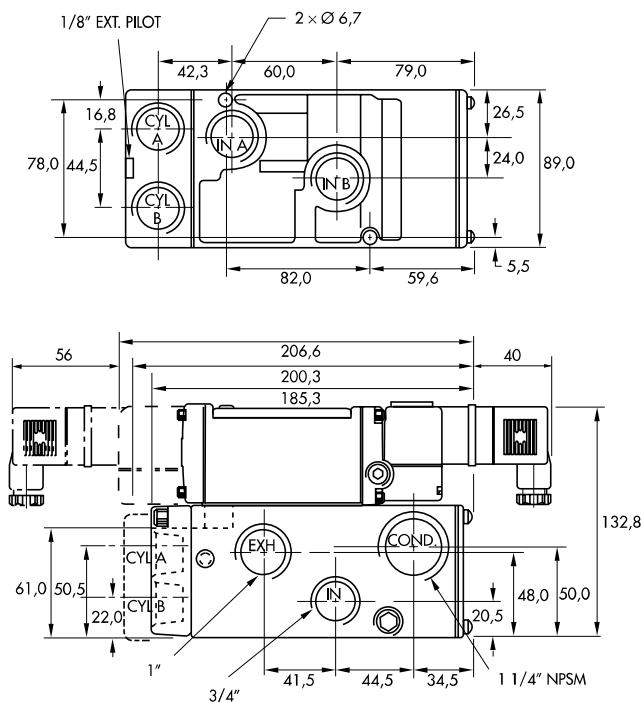



Direct solenoid and solenoid pilot operated valves

Function Port size Flow [Max] Manifold mounting Series

4/2 - 4/3

3/8" - 1/2" - 3/4"

5.1 C_v

sub-base
"plug-in"

OPERATIONAL BENEFITS

1. Balanced spool, immune to variations of pressure.
2. Short stroke with high flow.
3. High shifting forces.
4. Checked accumulator guarantees maximum pilot pressure.
5. Powerful return force thanks to the combination of mechanical and air springs.
6. Bonded spool with minimum friction, shifting in a glass-like finished bore.
7. Wiping effect eliminates sticking.
8. Pilot valve with balanced poppet, high flow, short and consistent response times.

HOW TO ORDER

Port size	Pilot air	4/2 Single operator	4/2 Double operator	4/3 Closed center	4/3 Open center	4/3 Pressure center
Valve less base		6511B-000-PM- XXY DA	6521B-000-PM- XXY DA	6531B-000-PM- XXY DA	6541B-000-PM- XXY DA	6551B-000-PM- XXY DA
sub-base	Internal	6511B-411-PM- XXY DA	6521B-411-PM- XXY DA	6531B-411-PM- XXY DA	6541B-411-PM- XXY DA	6551B-411-PM- XXY DA
3/8" NPTF	External	6511B-421-PM- XXY DA	6521B-421-PM- XXY DA	6531B-421-PM- XXY DA	6541B-421-PM- XXY DA	6551B-421-PM- XXY DA
sub-base	Internal	6511B-511-PM- XXY DA	6521B-511-PM- XXY DA	6531B-511-PM- XXY DA	6541B-511-PM- XXY DA	6551B-511-PM- XXY DA
1/2" NPTF	External	6511B-521-PM- XXY DA	6521B-521-PM- XXY DA	6531B-521-PM- XXY DA	6541B-521-PM- XXY DA	6551B-521-PM- XXY DA
sub-base	Internal	6511B-611-PM- XXY DA	6521B-611-PM- XXY DA	6531B-611-PM- XXY DA	6541B-611-PM- XXY DA	6551B-611-PM- XXY DA
3/4" NPTF	External	6511B-621-PM- XXY DA	6521B-621-PM- XXY DA	6531B-621-PM- XXY DA	6541B-621-PM- XXY DA	6551B-621-PM- XXY DA

Note : Above codes shown are for side cylinder ports without lights.

SOLENOID OPERATOR ►

XX Y DA *

XX	Voltage	Y	Manual operator
11	120/60, 110/50	1	Non-locking
12	240/60, 220/50	2	Locking
22	24/60, 24/50		
59	24 VDC (2.5 W)		
87	24 VDC (17.1 W)		
61	24 VDC (8.5 W)		

* Other options available, see page 357.

OPTIONS

6511B-XXX-PM-**XXY**DA

- For piped pilot exhaust replace M by P.
- For lights on valve body, replace by 3.
- For dual pressure valve replace by 4 (no light), by 5 (sgl. light), by 6 (dbl. light).
- For lights on manifold, replace by 2 (sgl. light), by 3 (dbl. light).

MODIFICATIONS

MOD. N°	DESCRIPTION	MODEL AVAILABILITY
0112	Side inlet & exhaust with bottom cyl. ports (No end cyl. ports)	Available on all manifold models
0210	Porting as ordered in model number plus an additional bottom inlet	Available on all manifold models
0364	Sgl. pressure — side inlet & exh. and additional bottom inlet with bottom cyl. ports (No end cyl. ports) DUAL PRESSURE — Same as sgl. pressure except with two bottom inlets.	Available on all manifold models

Note : 1. The valve less base is always the same for internal or external pilot. These options are effected in the manifold.
2. Bottom ports : Refer to modification table.
3. To order manifolds without the valve, choose the manifold from the above table, then add 6500B as a prefix. Example 6500B-411.

35

100

200

55

56

57

58

59

45

700

900

82

6300

6500

6600

1300

800

ISO 1

ISO 2

ISO 3

MAC 125A

MAC 250A

MAC 500A

TECHNICAL DATA

Fluid :	Compressed air, vacuum, inert gases	
Pressure range :	Internal pilot : single operator and 3 positions : 25-150 PSI	double operator : 10-150 PSI
	External pilot : vacuum to 150 PSI	
Pilot pressure :	Single operator and 3 positions : 25-150 PSI Double operator : 10-150 PSI	
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F to 210°F)	
Filtration :	40 µ	
Temperature range :	0°F to 120°F (-18°C to 50°C)	
Flow (at 6 bar, ΔP=1bar) :	3/8" : (4.5 C _v), 1/2" : (5.0 C _v), 3/4" : (5.1 C _v)	
Coil :	Epoxy encapsulated - class A wires - Continuous duty	
Voltage range :	-15% to +10% of nominal voltage	
Protection :	Consult factory	
Power :	~ Inrush : 14.8 VA Holding : 10.9 VA = 1 to 17.1 W	
Response times :	24 VDC (8.5 W)	Energize : 12 ms De-energize : 12 ms
	120/60	Energize : 9-14 ms De-energize : 11-18 ms

Spare parts :


- Solenoid operator (power ≥ 4 W) : D1-XXBE, cover mounting screws 35206 and seal 16234.
- Pilot valve : PME-XXYDA-BE, including seal 16337. • Pressure seal between valve and base : 16246.
- Mounting screw valve to base (x4) : 32201. • Tie-rod (x2) : 19540. • Fastening kit : N-65002-01
- Inlet isolator : 28309. • Exhaust isolator : 28310. • Blank station cover plate : N-65009.

Options :

- BSPP threads.

DIMENSIONS


Dimensions shown are metric (mm)

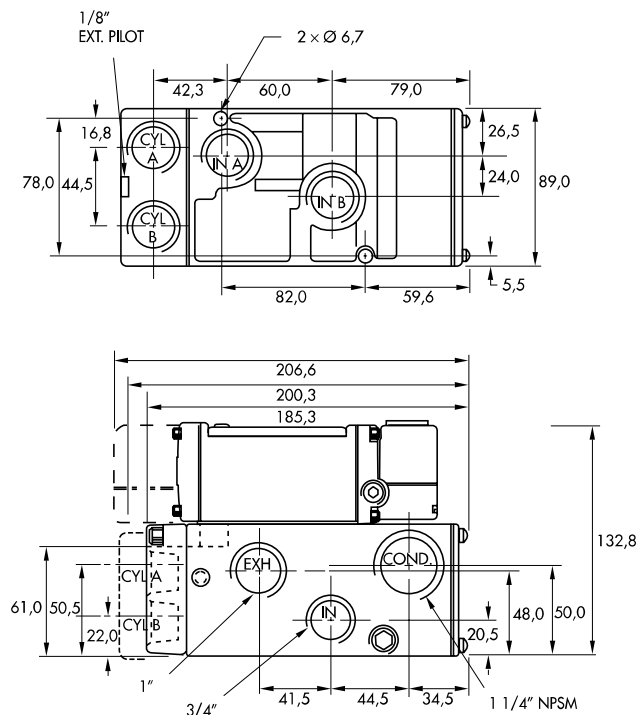




HOW TO ORDER

BODY/BASE OPTIONS

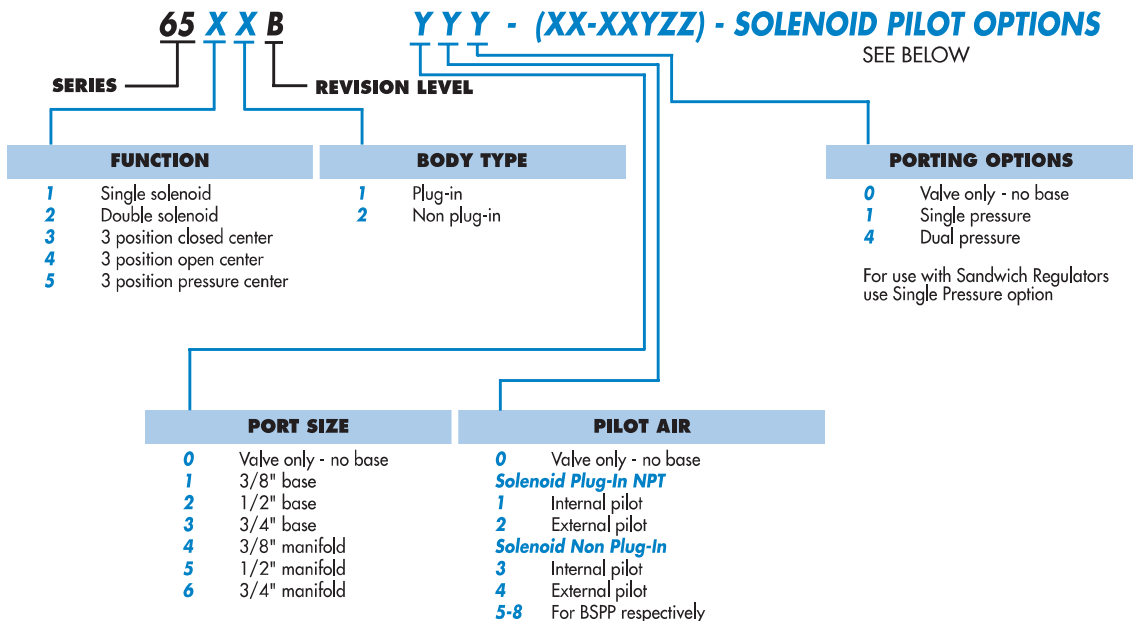

PILOT VALVE OPTIONS

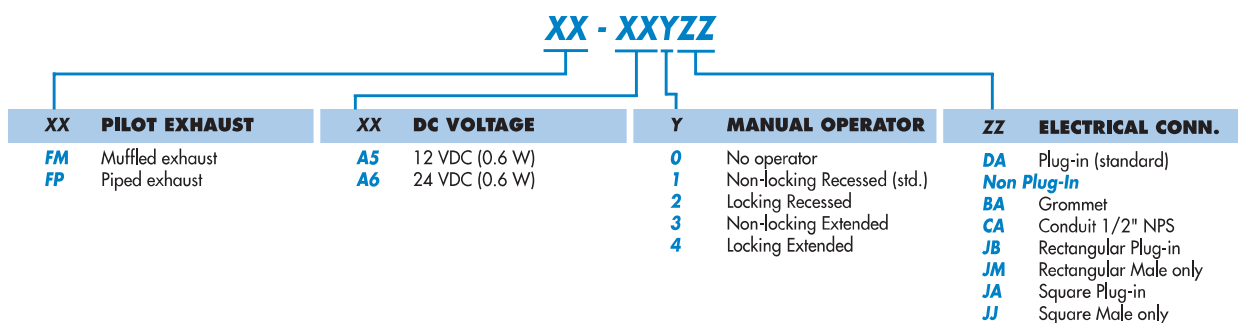

NOTE: 1. The valve less base is always the same for internal or external pilot. These options are effected in the base or manifold.
 2. Bottom ports: Refer to modification table below.
 3. Manifold Accessories: Inlet Isolator #28309. Exhaust Isolator #28310.

MODIFICATIONS

MOD. NO.	DESCRIPTION	MODEL AVAILABILITY
0002	Bottom inlet, exhaust, & cylinder ports (no side ports)	Available on individual base 3/8" & 1/2" only
0004	Full side porting and additional bottom inlet, exhausts, and cylinder ports	Available on individual base 3/8" only
0112	Side inlet & exhaust with bottom cylinder ports (no end cylinder ports)	Available on all manifold models
0210	Porting as ordered in model number plus an additional bottom inlet	Available on all manifold models
0364	Single Pressure - Side inlet & exhaust and additional bottom inlet with bottom cylinder ports (no end cylinder ports)	Available on all manifold models
	Dual Pressure - Same as single pressure except with two bottom inlets	



0 p t i o n s

Codification table for voltages / Manual operator / Electrical connection / Wire length

VALVE CODE ➤ **- XX Y ZZ (-VV)**
1 2 3 4

OPTIONS AVAILABLE FOR	OPTIONS AVAILABLE FOR
- valves type 100 Series - pilot valves "CNOMO"	- valves type 200 Series
- Pilot operated valves with pilots type 100 Series - Series : 55 - 56 - 700 - 800 - 900 - 6300 - 6500 - 6600 - 1300 - ISO 1 - ISO 2 - ISO 3. - MAC 125 - MAC 250 - MAC 500	- pilot operated valves with pilots type 200 Series - Series : 200 - 57 - 58 - 59.
- Pilot operated valves with pilots "CNOMO" - Series : ISO1 - ISO2 - ISO3	



Used on valve series: 100, 55, 56, 700, 800, 900, 6300, 6500, 6600, 1300, MVA1C, MVA2B, MVA3B, MAC125, MAC250, MAC500.

Used on valve series: 200, 57, 58, 59.

1. VOLTAGE (100 Serie type coil)				
- XX	Y	ZZ	VOLTAGE	
11			120/60, 110/50	
12			240/60, 220/50	
13			100/60, 100/50	
15			200/60, 200 /50	
16			10/60	
20			6/60	
21			12/50, 12/60	
22			24/60, 24/50	
23			32/60, 32/50	
24			48/60, 42/50	
26*			380/50, 440/50, 440/60, 480/60	
29			220/60	
34			127/50, 120/50	
35			48/50	
36			16/60	
B1			24/50	
50			24 VDC (6 W)	
51			24 VDC (4 W)	
54			12 VDC (4 W)	
55			12 VDC (6 W)	
57			12 VDC (2.5 W)	
59			24 VDC (2.5 W)	
60			12 VDC (8.5 W)	
61			24 VDC (8.5 W)	
64			6 VDC (6 W)	
65			32 VDC (7 W)	
66			48 VDC (5.8 W)	
67			64 VDC (7.5 W)	
68			120 VDC (6.4 W)	
69*			220 VDC (8.7 W), 250 VDC (11.2 W)	
75			90 VDC (8.8 W)	
76*			100 VDC (6.9 W)	
84*			125 VDC (10.9 W)	
87*			24 VDC (17.1 W)	
88*			12 VDC (17.4 W)	
89*			36 VDC (18.8 W)	
90			28 VDC (8.2 W)	
91*			6 VDC (10.6 W)	
92			190 VDC (6.5 W)	
94			3 VDC (7 W)	
95			38 VDC (6.4 W)	
A1			24 VDC (1 W)	
A2			12 VDC (1 W)	
A3			9 VDC (1 W)	

MOD. DD01 : Protection diode (DC) - MAX. 8.5W

MOD. MOV1 : Protection varistor (AC) - MAX. 8.5W

* Voltages are CLSF only

1. VOLTAGE (200 Serie type coil)				
- XX	Y	ZZ	VOLTAGE	
11			120/60, 110/50, 24 VDC (6 W)	
12			240/60, 220/50	
13			100/60, 100/50	
14			200/60, 200/50	
20			6/60	
21			12/60	
22			24/60, 24/50	
23			32/60, 32/50	
24			48/60, 42/50	
25			240/50	
26			480/60, 440/50	
27			127/60	
28			415/50	
29			220/60	
30			380/50	
31			550/60, 550/50	
32			120/60, 110/50	
33			600/60	
34			127/50	
35			48/50	
50			24 VDC (6 W)	
51			24 VDC (4.5 W)	
52			24 VDC (2.5 W)	
53			24 VDC (1.0 W)	
55			12 VDC (6 W)	
57			12 VDC (2.5 W)	
58			48 VDC (2.5 W)	
60			12 VDC (9.5 W)	
61			24 VDC (8.5 W)	
64			6 VDC (8.5 W)	
65			32 VDC (10 W)	
66			48 VDC (11.5 W)	
67			64 VDC (10.5 W)	
68			120 VDC (12.3 W)	
69			250 VDC (9.2 W)	
71			8 VDC (8.2 W)	
72			24 VDC (12 W)	
73			198 VDC (10 W)	
74			72 VDC (11.3 W)	
75			90 VDC (11.3 W)	
76			100 VDC (9 W)	
77			220 VDC (10 W), 230 VDC (11.6 W)	
78*			24 VDC (24 W)	
80			55 VDC (10.6 W)	
82			170 VDC (11.1 W)	
83			15 VDC (8.1 W)	
84			125 VDC (10 W)	
86			36 VDC (11 W)	
93*			12 VDC (24 W)	

2. MANUAL OPERATOR (Common options for 100 & 200 Series type coils)

- XX Y ZZ	MANUAL OPERATOR		
0	No operator	5*	No Operator with Light
1	Non-locking recessed	6*	Non-Locking Recessed with Light
2	Locking recessed	7*	Locking Recessed with Light
3	Non-locking extended	8*	Non-Locking Extended with Light
4	Locking extended	9*	Locking Extended with Light

* Lights used with "AA" electrical connection

3. ELECTRICAL CONNECTION (100 Serie type coil)

- XX Y ZZ	ELECTRICAL CONNECTION
AA	Wiring box with 1/2" NPS conduit
BA	Flying leads
CA	1/2" NPS conduit
CC	1/2" NPT conduit
FA	Military type 2 PIN
GA	Military type 3 PIN
HA	AA with ground wire
JA*	Square connector
JB	Rectangular connector
JC*	Square connector with light
JD	Rectangular connector with light
JE	Square connector on top (ISO2, ISO3)
JF	Rectangular connector on top (ISO1, ISO2, ISO3)
JG	JE with light
JH	JF with light
JJ	Square connector, male only
JM	Rectangular connector, male only
MA	Electrical common conduit (100 Series-Manifold/900 Series)
MB	Electrical common conduit (100 Series-Stacking/700 Series)
NA	CA with ground wire
NC	CC with ground wire
RA	3/8" NPS conduit

* Not to be used with 100, 800 and 900 Series manifold mounting

3. ELECTRICAL CONNECTION (200 Serie type coil)

- XX Y ZZ	ELECTRICAL CONNECTION
AA	Wiring box with 1/2" NPS conduit
BA	Flying leads
CA	1/2" NPS conduit
CC	1/2" NPT conduit
EA	Explosion proof (200 Series)
EA	Explosion proof (57, 58 & 59 Series)
FA	Military type 2 PIN
GA	Military type 3 PIN
HA	AA with ground wire
JA*	Square connector
JC	Square connector with light
JJ	Square connector, male only
NA	CA with ground wire
NC	CC with ground wire



4. COIL WIRE LENGTH (Common options for 100 & 200 Serie type coils)

- XX Y ZZ (-VV)	WIRE LENGTH
AA	18"
AB	24"
AD	36"
AE	48"
AF	72"
AG	6"
AR	12"
AU	120"
BA	60"
BB	144"
Series 6000 : wire length, from the base	
MOD L024	24"
MOD L036	36"
MOD L048	48"
MOD L060	60"
MOD L072	72"
MOD L120	120"